

Gigabit 24V 30W PoE Injector



EN30G-24

Product Overview

EN30G-24 is an indoor rated PoE midspan Injector specially designed for complex backhaul and networking applications. It provides 24Vdc, 1.25A power for remote PDs over 2 pairs output. It supports both 10/100 Base-T and Gigabit device.

It works for 30W PoE PDs, such as wireless APs, Wifi routers, Network cameras, IP Phones, Microwave Radio and other power Ethernet terminals.

Enclosed in an IP40 fire retardant plastic case. It works with a wide input voltage of 100-240 VAC, 50 or 60 Hz.

Compliant with Energy Efficiency of External Power Supplies regulations.

The effective distance is 100 meters over Cat5e/Cat6 cables. It is small in size but high performance.



Product Profile



1

2

3


1. LAN: Data Input Port
2. PoE: Data & Power Output Port



4

3. PoE Load Indicator
4. AC Power Input

Product Working Diagram

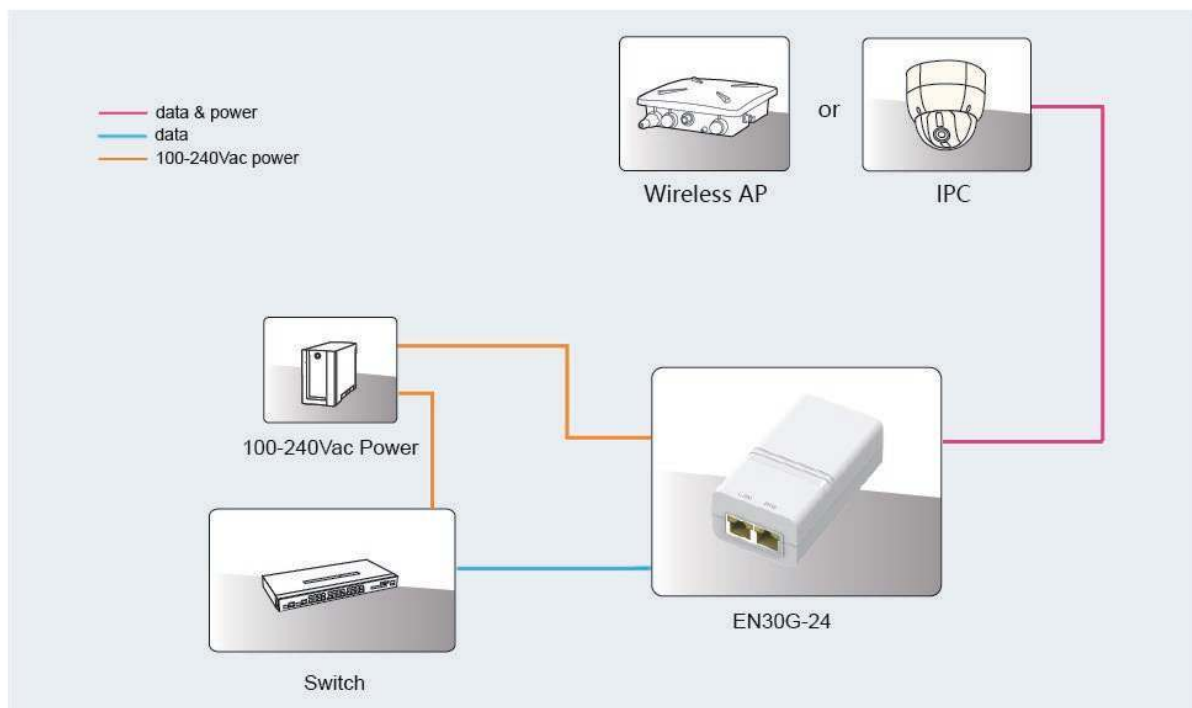

Specification

Standard

- IEEE802.3 10Base-T Ethernet
- IEEE802.3u 100Base-Tx Fast Ethernet
- IEEE802.3ab 1000Base-T Gigabit Ethernet
- RoHS Compliance
- WEEE Compliance

Input & Output

- Input :100-240Vac 1.0A 50/60Hz
- Output: 24Vdc 1250mA
- Power Pins: 4/5(+), 7/8(-)
- Data Speed: 10/100/1000Mbps

Working Environment

- Operating Temperature: 0℃ to 40℃
- Operating Humidity: 20% to 80%, non-condensation
- Storage Temperature: -20℃ to 70℃
- Storage Humidity: 10% to 90%, non-condensation
- Operating Altitude: up to 2000meters

AC Surge Protection

- Line-Earth 1.2/50us (8/20us): 2KV
- Line-Line 1.2/50us (8/20us): 1KV

Mechanical Characteristics

- Case: Plastic
- Color: White
- IP Rated: IP40
- Size: 95.3mm X 51mm X 34.5mm
- Weight: 135g

Safety Approvals

- CE
- FCC
- IEC 62368

EMI

- FCC CFR47 Part 15, EN55032, EN55035

EMS


- IEC61000-4-2(ESD) $\pm 4\text{kV}$ (contact), $\pm 8\text{kV}$ (air)
- IEC61000-4-3(RS) 3V/m(80MHz~1000MHz)
- IEC61000-4-4(EFT) Power Port: $\pm 1\text{kV}$; Data Port: $\pm 0.5\text{kV}$
- IEC61000-4-5(Surge) Line to Line: $\pm 1\text{kV}$, Line to Earth: $\pm 2\text{kV}$
- IEC61000-4-6(CS) 3V(0.15MHz~10MHz)

Immunity

- IEC60068-2-6(Vibration)
- IEC60068-2-27(Impact)
- IEC60068-2-32(Free Fall)

LED Indicator

- PoE Load Indicator : Green

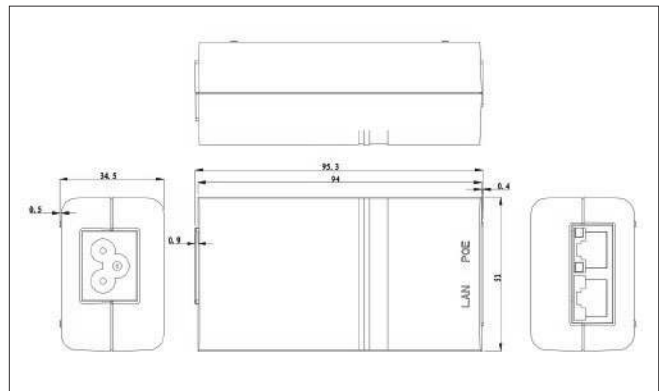

Order Info. EN30G-24

24Vdc/1.25A/1000Mbps/(4,5+,7,8-)

Packing.

EN30G-24
Power Cord x 1 (Optional)
Manual x 1